

 <p style="text-align: center;">State of Ohio Weatherization Program Standards</p>	Section	BUILDING SHELL INSTALLATION
	Subject	Overall Building Shell

OVERALL BUILDING SHELL TESTING 302-1.1

Perform a blower door test. Categorize areas that need to be addressed based on performance testing. Ensure that the Building Tightness Limits (BTL) minimum level of air leakage is available within the home. Ensure that the home will not be brought below the BTL, or that mechanical ventilation or pressure relief is added. Use the blower door and smoke bottle as a tool to assist in finding and sealing air leakage sites (see 1506-1). Continue to locate and seal air leakage sites until the target reduction goal is met or surpassed. Document the valid technical reason(s) which prevented the target reduction goal from being achieved.

crew assessment
302-1.1a

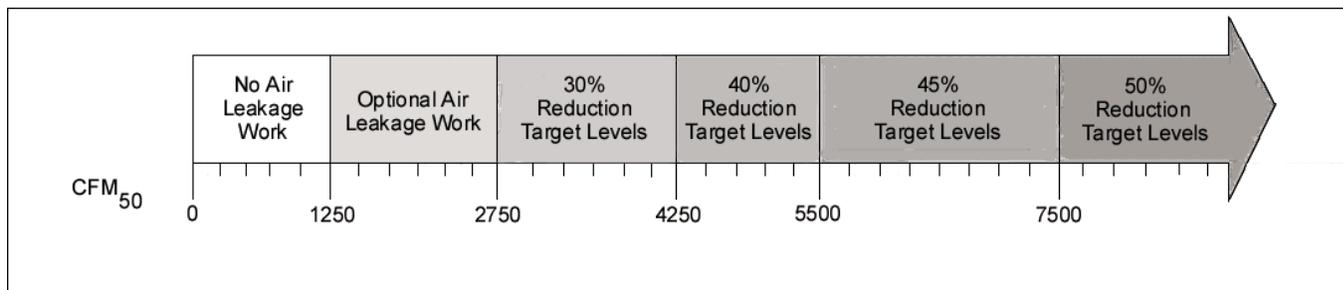


Figure 302-1.1a OVERALLS Scale