

 <p style="text-align: center;">State of Ohio Weatherization Program Standards</p>	Section	<b>MOBILE HOME INSTALLATION</b>
	Subject	<b>Overall Building Shell</b>

*AIR TIGHTNESS TESTING 702-1.1*

Perform a 1 point blower door test. Ensure that the Building Tightness Limits (BTL) minimum level of air leakage is available within the home. Ensure that the home will not be brought below the BTL or that mechanical ventilation of pressure relief is added. Use the blower door as a tool to assist in finding and sealing air leakage sites. Continue to locate and seal air leakage sites until the target reduction goal is met or surpassed. Document valid technical reasons which prevented the target reduction goal from being achieved.

**target reduction level**  
702-1.1a

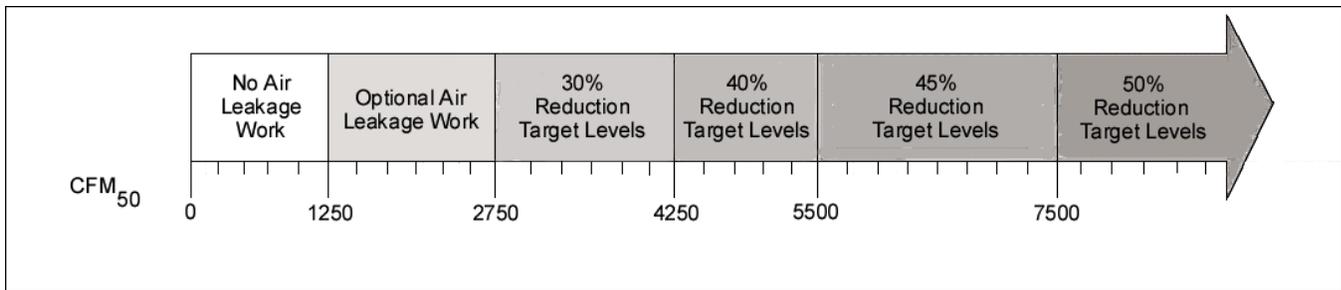


Figure 702.1.1 OVERALLS Scale